



CREWLINE PRO

SAFETY LINE RANGE


The Crewline Pro safety line range is designed to meet the needs of those who may wish to tether to a yacht in unstable conditions, where there may be risk of falling overboard. Constructed using self-locking safety hooks, with a wide opening, allows the user to easily attach the Crewline Pro to the attachment point on a lifejacket or safety harness and a suitable anchor point on the yacht as required.

Constructed from a durable, hydrophobic webbing helps to keep the safety line as light as possible, even in the harshest environments, as it reduces the amount of water absorbed compared with more conventional safety lines. This, combined with its advanced hook makes the Crewline Pro a first choice for those sailing in a high performance racing environments where nothing but the very best in performance technology will do.

Each Crewline Pro includes an overload indicator which is activated when the line is placed under an excessive load of 400 kg. There is additionally a warning label which, when exposed, means the safety line should not be used. The range is available in four variants – including elastic and non-elastic with a choice of a single, double or triple hook set up.

FEATURES

- **Lightweight self-locking hook**
- **Reflective detailing**
- **Compact**
- **Constructed from a durable, hydrophobic webbing**
- **Electric neon colourway**
- **Easy to use**
- **Overload indicator (maximum weight 400 kg)**

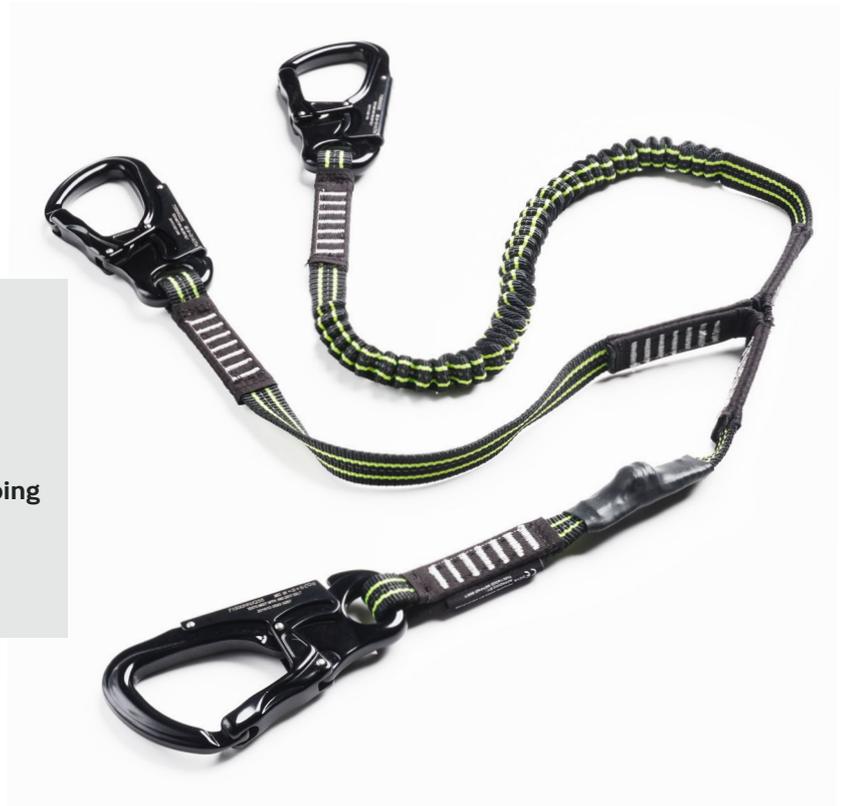

Example shown is the three hook elasticated line

MARINE ACCIDENT INVESTIGATION BRANCH – SAFETY LESSON – ISSUED JANUARY 2018

To prevent the strength of a safety harness tether becoming compromised in-service due to lateral loading on the tether hook, the method used to anchor the end of the tether to the vessel should be arranged to ensure that the tether hook cannot become entangled with deck fittings or other equipment. [Click for more.](#)

SINGLE HOOK



DOUBLE HOOK



DOUBLE HOOK ELASTICATED



TRIPLE HOOK ELASTICATED



TECHNICAL DATA

| | |
|--------------------|---------------------|
| Type | Safety Line |
| Webbing Material | Hydrophobic Webbing |
| Hook | Self-locking |
| Overload Indicator | Yes |

Ordering Information

| PART NUMBER | PRODUCT NAME |
|-------------|--|
| 3050-ESL2 | Crewline Pro Double Hook Elasticated |
| 3050-ESL3 | Crewline Pro Triple Hook Elasticated |
| 3050-SL1 | Crewline Pro Single Hook Non-Elasticated |
| 3050-SL2 | Crewline Pro Double Hook Non-Elasticated |

Approvals

ISO approved 12401

